

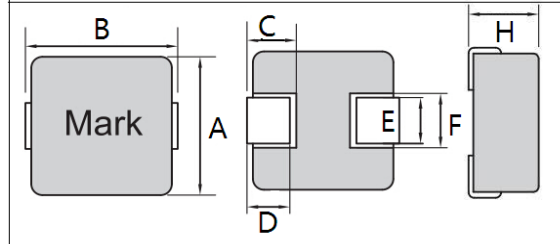


外型及尺寸 Shape and size ( unit: mm )

[Anruike/安瑞科 www.anruike.com](http://www.anruike.com) Tel:0755-29805463



产品型号	A	B (Max)	H (Max)	C	D	E	F	N	J	G	unit package
ASDC0530	4.7	5.2	3.0	1.6	1.0	2.0	2.5	7.5	2.5	3.5	<b>1500PCS/R</b>

电气参数 Electrical parameters

[Anruike/安瑞科 www.anruike.com](http://www.anruike.com) Tel: 0755-29805463

产品型号 Part NO	电感量 Inductance L (uH) ±20%	测试条件 Test Condition	直流电阻 (mΩ) DCResistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A) (Max)
			Typical	Max		
ASDC0530-R68M	0.68	100KHz/1.0V	11	18	8	14
ASDC0530-1R0M	1.0	100KHz/1.0V	13	22	7	12
ASDC0530-1R5M	1.5	100KHz/1.0V	20	25	6	10
ASDC0530-2R2M	2.2	100KHz/1.0V	26.5	40	5	7
ASDC0530-3R3M	3.3	100KHz/1.0V	42	56	4	7
ASDC0530-4R7M	4.7	100KHz/1.0V	46	60	3	4.5
ASDC0530-5R6M	5.6	100KHz/1.0V	62	80	3	4
ASDC0530-6R8M	6.8	100KHz/1.0V	78	108	2.5	4
ASDC0530-100M	10.0	100KHz/1.0V	115	150	2	4

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

\* K 表示电感值的公差为±10%, M 表示电感值的公差为±20%, N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.

深圳市安瑞科電子有限公司/優質電感專業製造商.....Tel:0755-29805463,27994543 Fax:0755-29805221

<http://www.anruike.com> E-mail: [ark@anruike.com](mailto:ark@anruike.com)