

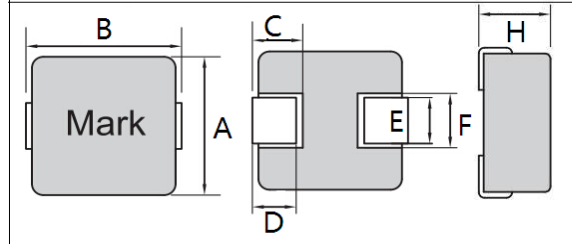


外型及尺寸 Shape and size (unit: mm)

Anruike/安瑞科 www.anruike.com Tel:0755-29805463



产品型号	A	B (Max)	H (Max)	C	D	E	F	N	J	G	unit package
ASDC0630	6.0	6.5	3.0	1.6	1.3	2.5	3.0	7.5	3.2	3.5	1500PCS/R

电气参数 Electrical parameters

Anruike/安瑞科 www.anruike.com Tel: 0755-29805463

产品型号 Part NO	电感量 Inductance L (uH) ±20%	测试条件 Test Condition	直流电阻 (mΩ) DC Resistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A) (Max)
			Typical	Max		
ASDC0630-R10M	0.1	100KHz/1.0V	2.1	2.4	29.0	54.0
ASDC0630-R15M	0.15	100KHz/1.0V	2.7	3.5	27.0	36.0
ASDC0630-R33M	0.33	100KHz/1.0V	4.2	5.0	19.0	30.0
ASDC0630-R47M	0.47	100KHz/1.0V	4.9	5.7	15.0	22.5
ASDC0630-R56M	0.56	100KHz/1.0V	5.5	6.3	14.0	18.0
ASDC0630-R68M	0.68	100KHz/1.0V	6.7	7.4	13.0	16.0
ASDC0630-R82M	0.82	100KHz/1.0V	7.6	8.4	11.0	15.0
ASDC0630-1R0M	1.0	100KHz/1.0V	9.4	10.4	9.0	14.0
ASDC0630-1R2M	1.2	100KHz/1.0V	11.0	14.0	9.0	13.0
ASDC0630-1R5M	1.5	100KHz/1.0V	15.0	17.0	7.0	13.0
ASDC0630-2R2M	2.2	100KHz/1.0V	19.0	21.0	6.0	9.0
ASDC0630-2R5M	2.5	100KHz/1.0V	22.0	25.0	6.0	9.0
ASDC0630-4R7M	4.7	100KHz/1.0V	39.0	46.0	5.0	9.0
ASDC0630-5R6M	5.6	100KHz/1.0V	54.6	59.0	5.0	6.0
ASDC0630-6R8M	6.8	100KHz/1.0V	61.5	70.0	4.0	5.0
ASDC0630-8R2M	8.2	100KHz/1.0V	75.6	84.0	4.0	5.0
ASDC0630-100M	10.0	100KHz/1.0V	87.0	95.0	4.0	5.0

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

* K 表示电感值的公差为±10%, M 表示电感值的公差为±20%, N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.