

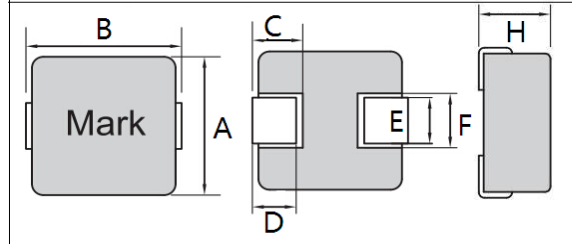


外型及尺寸 Shape and size (unit: mm)

Anruike/安瑞科 www.anruike.com Tel:0755-29805463



产品型号	A	B (Max)	H (Max)	C	D	E	F	N	J	G	unit package
ASDC0718	6.6	7.2	1.8	2.0	1.6	3.0	3.6	8.4	3.7	3.5	1500PCS/R

电气参数 Electrical parameters

Anruike/安瑞科 www.anruike.com Tel: 0755-29805463

产品型号 Part NO	电感量 Inductance L (uH) ±20%	测试条件 Test Condition	直流电阻 (mΩ) DC Resistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A) (Max)
			Typical	Max		
ASDC0718-R10M	0.1	100KHz/1.0V	2.0	2.5	18.0	45.0
ASDC0718-R33M	0.33	100KHz/1.0V	5.2	6.8	12.0	22.0
ASDC0718-R47M	0.47	100KHz/1.0V	7.3	8.4	11.0	18.0
ASDC0718-R68M	0.68	100KHz/1.0V	10.8	12.7	9.0	17.0
ASDC0718-1R0M	1.0	100KHz/1.0V	14.5	17.0	7.0	14.0
ASDC0718-2R0M	2.0	100KHz/1.0V	28.0	32.0	6.0	13.0
ASDC0718-2R2M	2.2	100KHz/1.0V	31.0	35.0	6.0	13.0
ASDC0718-3R3M	3.3	100KHz/1.0V	56.0	60.0	3.5	10.0
ASDC0718-4R7M	4.7	100KHz/1.0V	68	3.5	3.5	5.0
ASDC0718-6R8M	6.8	100KHz/1.0V	101	2.8	2.8	3.5

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

* K 表示电感值的公差为±10%, M 表示电感值的公差为±20%, N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.