


# Anruike 安瑞科/SMD POWER INDUCTORS **CD32** SERIES

外型及尺寸 Shape and size ( unit: mm )

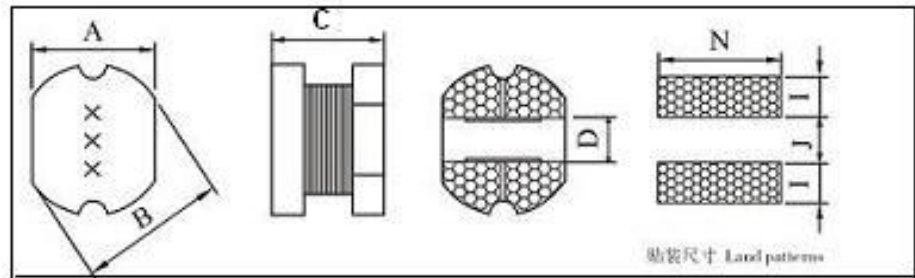

产品型号	A±0.3	B±0.3	C±0.3	D	N	J	I	最小包装数量
CD32	3.0	3.5	2.1	1.0	4.0	1.5	0.8	3000PCS/盘

## 电气参数 Electrical parameters

产品型号	电感量(uH)	公差(%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD32-2R2M	2.2	±20	100KHz/0.25V	0.07	3.90
CD32-2R7M	2.7	±20	100KHz/0.25V	0.08	3.45
CD32-3R3M	3.3	±20	100KHz/0.25V	0.09	3.30
CD32-4R7M	4.7	±20	100KHz/0.25V	0.13	2.70
CD32-5R6M	5.6	±20	100KHz/0.25V	0.15	2.30
CD32-6R8M	6.8	±20	100KHz/0.25V	0.19	2.20
CD32-8R2M	8.2	±20	100KHz/0.25V	0.23	2.10
CD32-100K	10	±10	100KHz/0.25V	0.26	1.90
CD32-150K	15	±10	100KHz/0.25V	0.39	1.60
CD32-180K	18	±10	100KHz/0.25V	0.49	1.50
CD32-220K	22	±10	100KHz/0.25V	0.58	1.25
CD32-270K	27	±10	100KHz/0.25V	0.75	1.30
CD32-330K	33	±10	100KHz/0.25V	0.87	1.20
CD32-470K	47	±10	100KHz/0.25V	1.30	0.85
CD32-560K	56	±10	100KHz/0.25V	1.59	0.80
CD32-680K	68	±10	100KHz/0.25V	1.82	0.65
CD32-820K	82	±10	100KHz/0.25V	2.44	0.60
CD32-101K	100	±10	100KHz/0.25V	2.60	0.55
CD32-121K	100	±10	100KHz/0.25V	3.60	0.50
CD32-151K	150	±10	100KHz/0.25V	4.20	0.48
CD32-181K	180	±10	100KHz/0.25V	4.90	0.45
CD32-221K	220	±10	100KHz/0.25V	5.10	0.40
CD32-251K	250	±10	100KHz/0.25V	6.85	0.38
CD32-271K	270	±10	100KHz/0.25V	8.00	0.36

以上参数仅供参考, 精准参数以样品为准。本页面未能全部录入, 需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818