


# Anruike 安瑞科 / SMD POWER INDUCTORS CD43 SERIES

外型及尺寸 Shape and size ( unit: mm )

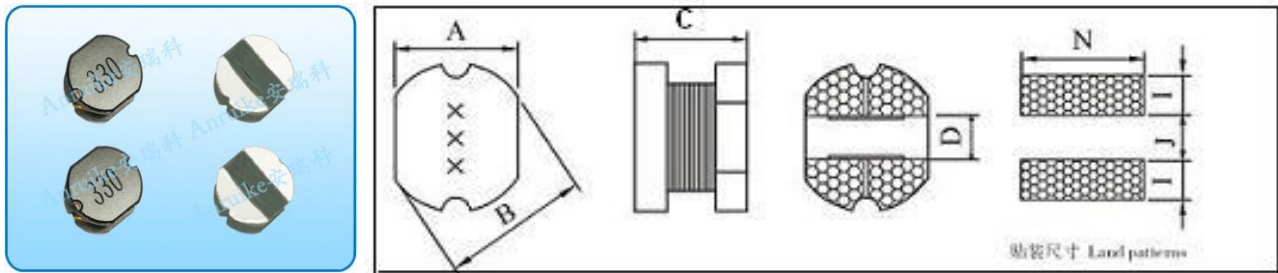

产品型号	A±0.3	B±0.3	C±0.3	D	N	J	I	最小包装数量
CD43	4.0	4.5	3.2	1.2	4.5	2.0	1.0	2000PCS/盘

电气参数 Electrical parameters

产品型号	电感量(uH)	公差(%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD43-1R5M	1.5	±20	100KHz/0.25V	0.020	4.50
CD43-3R3M	3.3	±20	100KHz/0.25V	0.037	2.70
CD43-3R9M	3.9	±20	100KHz/0.25V	0.043	2.50
CD43-4R7M	4.7	±20	100KHz/0.25V	0.047	2.30
CD43-5R6M	5.6	±20	100KHz/0.25V	0.076	2.10
CD43-6R8M	6.8	±20	100KHz/0.25V	0.800	2.0
CD43-8R2M	8.2	±20	100KHz/0.25V	0.085	1.9
<b>CD43-100K</b>	<b>10</b>	<b>±10</b>	<b>100KHz/0.25V</b>	<b>0.11</b>	<b>1.80</b>
CD43-120K	12	±10	100KHz/0.25V	0.140	1.40
CD43-220K	22	±10	100KHz/0.25V	0.190	1.32
CD43-270K	27	±10	100KHz/0.25V	0.340	1.30
CD43-330K	33	±10	100KHz/0.25V	0.360	1.25
CD43-390K	39	±10	100KHz/0.25V	0.38	0.85
CD43-470K	47	±10	100KHz/0.25V	0.41	0.80
CD43-560K	56	±10	100KHz/0.25V	0.62	0.63
CD43-680K	68	±10	100KHz/0.25V	0.68	0.56
CD43-820K	82	±10	100KHz/0.25V	0.70	0.51
CD43-101K	100	±10	100KHz/0.25V	0.90	0.50
CD43-121K	120	±10	100KHz/0.25V	1.20	0.45
CD43-151K	150	±10	100KHz/0.25V	1.56	0.43
CD43-181K	180	±10	100KHz/0.25V	1.80	0.40
CD43-221K	220	±10	100KHz/0.25V	2.10	0.36
CD43-271K	270	±10	100KHz/0.25V	2.7	0.34
CD43-331K	330	±10	100KHz/0.25V	2.8	0.27
CD43-391K	390	±10	100KHz/0.25V	3.90	0.26
CD43-471K	470	±10	100KHz/0.25V	4.40	0.24

以上参数仅供参考, 精准参数以样品为准。本页面未能全部录入, 需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel:0755-29805463 27994543 FAX:0755-29805221

网址: <http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818