
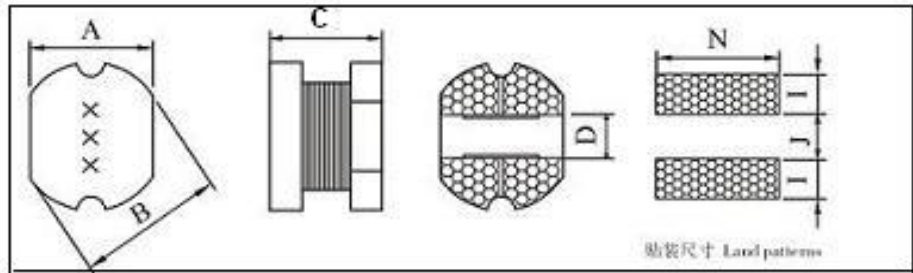


Anruike 安瑞科 / SMD POWER INDUCTORS **CD73** SERIES

外型及尺寸 Shape and size (unit: mm) [Anruike/安瑞科](http://www.anruike.com) www.anruike.com Tel:0755-29805463



产品型号	A±0.3	B±0.3	C±0.3	D	N	J	I	最小包装数量
CD73	7.0	7.8	3.5	2.1	7.5	3.5	1.5	1000PCS/卷

电气参数 Electrical parameters [Anruike/安瑞科](http://www.anruike.com) www.anruike.com Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD73-3R3M	3.3	±30	100KHz/0.25V	0.016	6.50
CD73-5R6M	5.6	±20	100KHz/0.25V	0.032	4.50
CD73-6R8M	6.8	±20	100KHz/0.25V	0.028	3.80
CD73-8R2M	8.2	±20	100KHz/0.25V	0.040	3.60
CD73-100K	10	±10	100KHz/0.25V	0.05	3.50
CD73-120K	12	±10	100KHz/0.25V	0.07	3.33
CD73-150K	15	±10	100KHz/0.25V	0.08	3.24
CD73-180K	18	±10	100KHz/0.25V	0.09	3.12
CD73-220K	22	±10	100KHz/0.25V	0.10	2.50
CD73-270K	27	±10	100KHz/0.25V	0.15	1.94
CD73-330K	33	±10	100KHz/0.25V	0.17	1.85
CD73-390K	39	±10	100KHz/0.25V	0.18	1.74
CD73-470K	47	±10	100KHz/0.25V	0.20	1.60
CD73-560K	56	±10	100KHz/0.25V	0.28	1.64
CD73-680K	68	±10	100KHz/0.25V	0.33	1.59
CD73-820K	82	±10	100KHz/0.25V	0.41	1.54
CD73-101K	100	±10	100KHz/0.25V	0.48	1.51
CD73-121K	120	±10	100KHz/0.25V	0.54	0.99
CD73-151K	150	±10	100KHz/0.25V	0.75	0.90
CD73-181K	180	±10	100KHz/0.25V	0.9	0.86
CD73-221K	220	±10	100KHz/0.25V	1.00	0.71
CD73-271K	270	±10	100KHz/0.25V	1.11	0.68
CD73-331K	330	±10	100KHz/0.25V	1.18	0.65
CD73-391K	390	±10	100KHz/0.25V	1.60	0.46
CD73-471K	470	±10	100KHz/0.25V	1.75	0.43
CD73-821K	820	±10	100KHz/0.25V	2.20	0.31
CD73-102K	1000	±10	100KHz/0.25V	2.80	0.28

以上参数仅供参考, 精准参数以样品为准。本页面未能全部录入, 需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel:0755-29805463 27994543 FAX:0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818