
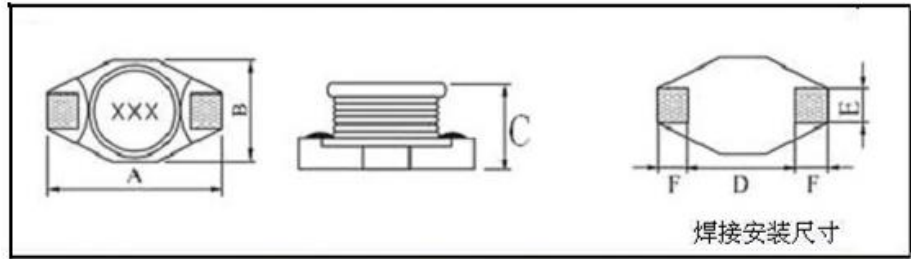


# Anruike 安瑞科/SMD POWER INDUCTORS CDF3316 SERIES

外型及尺寸 (单位: mm) Shape and size ( unit: mm )

Anruike/安瑞科



产品型号	A (Max)	B (Max)	C (Max)	D	E	F	载带盘装
CDF3316	12.95	9.40	5.21	7.62	2.54	2.54	1000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDF3316-3R3M	3.3	±20	100KHz/0.25V	0.02	10.0
CDF3316-4R7M	4.7	±20	100KHz/0.25V	0.018	7.40
CDF3316-6R8M	6.8	±20	100KHz/0.25V	0.027	5.60
CDF3316-100M	10	±20	100KHz/0.25V	0.038	3.80
CDF3316-150M	15	±20	100KHz/0.25V	0.046	3.7
CDF3316-220M	22	±20	100KHz/0.25V	0.085	3.4
CDF3316-330M	33	±20	100KHz/0.25V	0.095	3.0
CDF3316-470M	47	±20	100KHz/0.25V	0.140	1.9
CDF3316-680M	68	±20	100KHz/0.25V	0.17	1.8
CDF3316-101K	100	±10	100KHz/0.25V	0.26	1.60
CDF3316-121K	120	±10	100KHz/0.25V	0.320	1.10
CDF3316-221K	220	±10	100KHz/0.25V	0.610	1.00
CDF3316-271K	270	±10	100KHz/0.25V	0.800	0.85
CDF3316-331K	330	±10	100KHz/0.25V	1.020	0.70
CDF3316-391K	390	±10	100KHz/0.25V	1.100	0.65
CDF3316-471K	470	±10	100KHz/0.25V	1.270	0.60
CDF3316-561K	560	±10	100KHz/0.25V	1.340	0.55
CDF3316-681K	680	±10	100KHz/0.25V	2.320	0.50
CDF3316-821K	820	±10	100KHz/0.25V	3.310	0.46
CDF3316-102K	1000	±10	100KHz/0.25V	3.4	0.44
CDF3316-152K	1500	±10	100KHz/0.25V	3.5	0.42
CDF3316-332K	3300	±10	100KHz/0.25V	8.0	0.27
CDF3316-472K	4700	±10	100KHz/0.25V	9.5	0.25
CDF3316-682K	6800	±10	100KHz/0.25V	11.0	0.23
CDF3316-822K	8200	±10	100KHz/0.25V	12.0	0.22
CDF3316-103K	10000	±10	100KHz/0.25V	13.0	0.21

以上参数仅供参考,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ: 1193940818